



# DRC II Dual Recycling Compactor

*Increase Your  
Return on the  
Sales of Recycled  
Materials*

*Two Compactors  
in One*

*Neat and Attractive  
Appearance*

*Excellent for  
Applications  
Where Recycling is  
Required but There  
is Only Room for  
One Compactor*



The Flex-D-Vider® makes continuous or batch feed applications possible.

**RAMJET**   
Stationary and self-contained compactors.



**Environmental  
Solutions Group**

A DOVER COMPANY

*Hospitals*

*Restaurants*

*Manufacturing Plants*

*Malls*

*Retail Stores*

*High-Rise Office Buildings*

Compaction combinations are limitless with the DRC II:

- ▼ Garbage and Corrugated
- ▼ Corrugated and High-Grade Paper
- ▼ Paper and Aluminum Cans
- ▼ Garbage and Co-Mingled Recyclables

## DRC II Dual Recycling Compactor

The DRC II is one dual-purpose compactor, occupying one space, with two separate compartments that enable you to compact a wide range of waste and recyclables all at one time.

### Marathon's DRC II Offers Many Features and Benefits:

- ▼ **Increase Your Return**  
Two separate compartments segregate waste and recyclables, which increases your return on the sale of recycled materials.
- ▼ **Two Compactors in One**  
Separate, compact, and process two different materials, such as recyclables and garbage, at the same time in an area where space permits only one compactor.
- ▼ **Neat and Attractive Appearance**  
Both recyclables and garbage are neatly contained after compaction, providing your building, facility, mall, or store with a neat and attractive appearance.



The DRC II meets the challenge of state requirements for waste and recyclables at this high-rise office building where space is limited. The covered installation provides additional convenience for personnel.



At this large hospital, the DRC II averages 60% trash in one compartment and 40% cardboard in the other compartment. This provides convenience and flexibility with only one unit.



At this large urban department store, the DRC II averages a payload of 5 to 6 tons. Its lockable enclosed hopper, surrounded by a securely fenced loading area, increases employee security and confidence when depositing waste and recyclables for compaction.




Also available with an advanced system for measuring and reporting container usage and fullness. Users can input an I.D. number to access the compactor.

## A New Dimension in Recycling

### **Flex-D-Vider®**

#### **Creates Two Variable-Capacity Compartments**

The DRC II has a total capacity of 28 cubic yards (21 cubic meters). The two variable-capacity compartments are separated by a 24" (609,6mm) high solid welded barrier. This wall prevents liquid leaking from one side to the other. The DRC II accepts and compacts unequal and unpredictable volumes of two separate discardables. This is made possible by Marathon's Flex-D-Vider, a pivoting steel wall that adjusts the compartments' capacity during the loading and packing process. For easier discharge of the materials in the smaller compartment, a hydraulic cylinder enables the operator to move the Flex-D-Vider to the vertical center of the container, relieving the pressure on the remaining waste or recyclables. Each compartment when loaded can represent as little as 30% or as much as 70% of the unit's total volume. The DRC II can also be chute-fed to increase customer security and reduce labor costs.

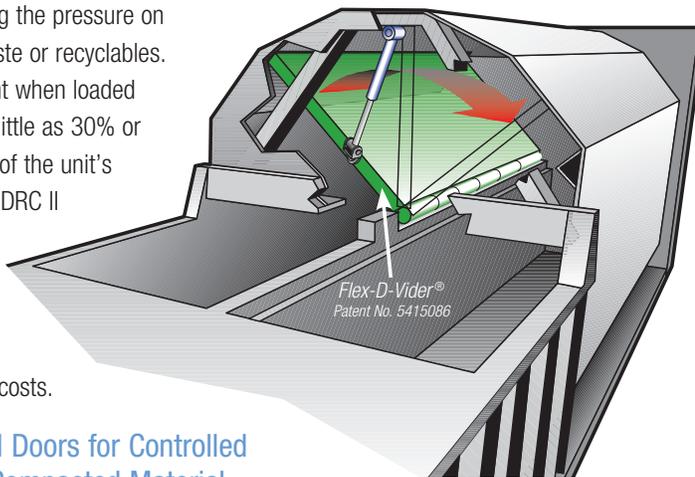


#### **Four Individual Doors for Controlled Discharge of Compacted Material**

Due to the many variable positions in which the Flex-D-Vider can be located, four individual doors are used for the discharge of materials.

- ✔ Upper doors are top hinged and have ratchet locks that enable the door to be opened independently of the lower doors.
- ✔ Lower doors are hinged in the center of the container. Each door is equipped with Marathon's standard ratchet latch and open independently for controlled discharge of compacted material.
- ✔ For wet waste applications, an optional door gasket is available with Marathon's custom designed P-shaped door seal, developed specially for self-contained compactors used for wet waste. Either or both sides may be gasketed.

### **Qwik Clean Tank®**

The Qwik Clean Tank with exclusive Trash Check™ is a standard feature on the DRC II. It funnels any liquid seepage occurring during compaction into an enclosed area underneath the charge box floor. The liquid is automatically discharged at the disposal site, in effect flushing the container and the area behind the ram.

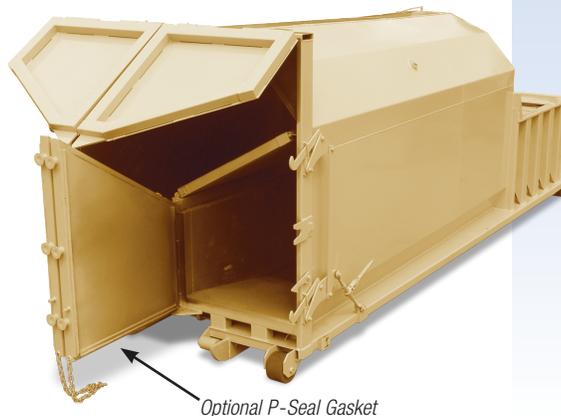

The Dual Recycling Compactor can be fitted with a variety of optional equipment such as through-the-wall security chutes and lockable doghouse hoppers. The DRC II is well suited for ground, doghouse, dock, or chute feed applications. Doghouses may be rear or side feed, or both.






#### **The DRC II features Marathon's CYCON Life-Xtender® Cyclic Control System**

- ✔ Reliable, solid-state circuitry eliminates all pressure and limit switches.
- ✔ Extends wear life of cylinder and hoses — guaranteed by no-shock cycle control.
- ✔ Automatic "Container Full Assurance System" — ram dwells against the load at full pressure, resulting in better compaction.
- ✔ Smoother running, quieter operation.
- ✔ Advanced hydraulic design enables the system to operate at minimum pressure levels until the need for more pressure is automatically sensed.
- ✔ Ensures more accurate "Advanced Warning" or "Container Full" options.
- ✔ Dramatically improves cold weather performance.

# DRC II Dual Recycling Compactor

## Dimensions and Specifications

Specifications:		
<b>Charge Box Capacity</b>		
Mfr. Rating (each side)	0.91 cy	0.70 m <sup>3</sup>
Mfr. Rating (total)	1.82 cy	1.40 m <sup>3</sup>
NWRA Rating (total)	1.79 cy	1.37 m <sup>3</sup>
Clear Top Opening	34½" x 48½"	876mm x 1219mm
Capacity per Hour (total)	165 cy	126 m <sup>3</sup>
Performance Characteristics:		
Cycle Time	39 sec.	39 sec.
Total Maximum Force	31,800 lbs.	141 kN
Maximum Ram Face Pressure	18.7 psi	129 kPa
Ram Penetration	6½"	165mm
Electrical Equipment:		
Electrical Motor 3/60/230-480	10 HP	7.5 kW
Electrical Control Voltage	120 VAC	120 VAC
Electrical Controls	3-Button Controls: Keylock Start, Stop, Reverse	
Hydraulic Equipment:		
Hydraulic Pump Capacity	10 gpm	38 L/min.
Normal Pressure	2,000 psi	138 bar
Cylinder Bore	4½"	114mm
Cylinder Rod	2½"	64mm
Cylinder Stroke	55½"	1410mm
Weight	16,000 lbs.	7258 kg

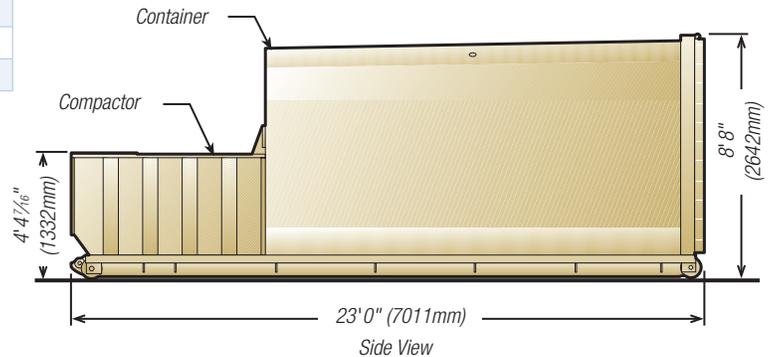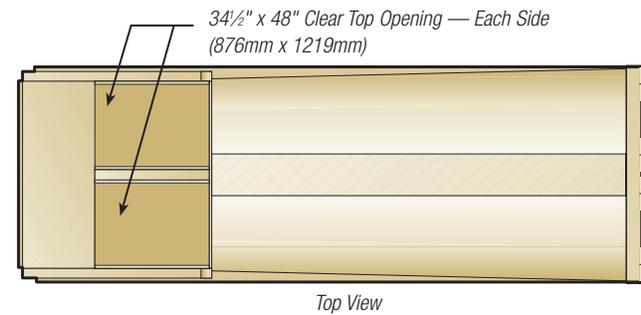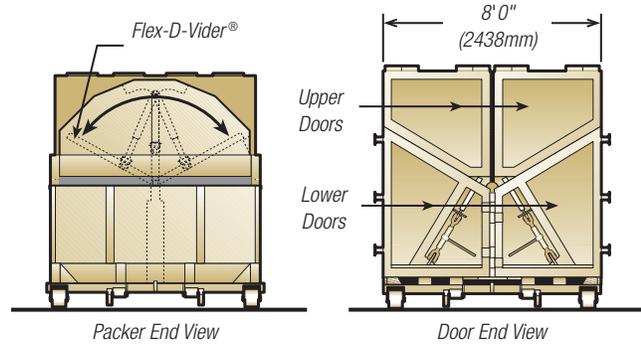

## Compactor Rental and Leasing Programs Available

For detailed specifications, recommendations, or free economic studies comparing various systems, contact Marathon Customer Care at **1-800-633-8974**.

## Authorized Dealer:

Please refer [MarathonEquipment.com](http://MarathonEquipment.com) for the online brochure with the most up-to-date information.



**MARATHON**  
A DOVER COMPANY

**Marathon Equipment Company**  
P.O. Box 1798  
Vernon, AL 35592-1798  
800.633.8974  
[www.marathonequipment.com](http://www.marathonequipment.com)  
NJPA Contract #060612-ESG

**National Waste & Recycling Association**  
Collect. Recycle. Innovate.

**ISRI**  
MEMBER

**Environmental Solutions Group**  
A DOVER COMPANY  
[www.doveresg.com](http://www.doveresg.com)

**f YouTube**

Pictures in this literature are illustrative only. Specifications are subject to change without notice in order to accommodate improvements to the equipment. Complies with ANSI Regulation Z245.2, all OSHA standards, and certified under WASTE's Stationary Compactor Certification Program. Products must be used with safe practice and in accordance with all applicable regulations and standards.