

# PINNACLE STATIONARY COMPACTORS

COLLECT IT... CONTAIN IT... COMPACT IT!



Perfect for Commercial & Industrial Applications



Standard in 2 to 5 Cubic Yard Capacities



Designed & Engineered for Strength & Dependability



Soft Shift Hydraulics with The Flex Power Unit

[PinnacleCompactors.com](http://PinnacleCompactors.com)



# PINNACLE STATIONARY COMPACTORS

## POWER YOU CAN DEPEND ON

- ⚡ The Flex Power Unit by Pinnacle is state of the art and provides unmatched performance
- ⚡ 15HP/12GPM and 15HP/15GPM configurations offered as standard equipment
- ⚡ Calibrating and learning technology makes The Flex a universal exchange with other brands
- ⚡ Soft shift hydraulics combined with pressure cylinders out performs bypass cylinder systems
- ⚡ Pinnacle PLR & PLC Operating Systems Are More Reliable, Durable, & Easier to Troubleshoot
- ⚡ All Pinnacle power units are UL Listed and approved

All compactors are designed to provide reliable performance in standard and heavy duty applications.

Available in 2yd to 5yd capacities


Applications include solid waste, recycling, scrap metal, cardboard, and more.

Power units built by Pinnacle in-house service technicians and are UL listed

Stationary Compactors come standard with "The Flex" pressure cylinders CPU

Pinnacle Technical Service provides turnkey assistance before, during, and after the sale

All compactor equipment is built to ANSI safety specifications and OSHA requirements

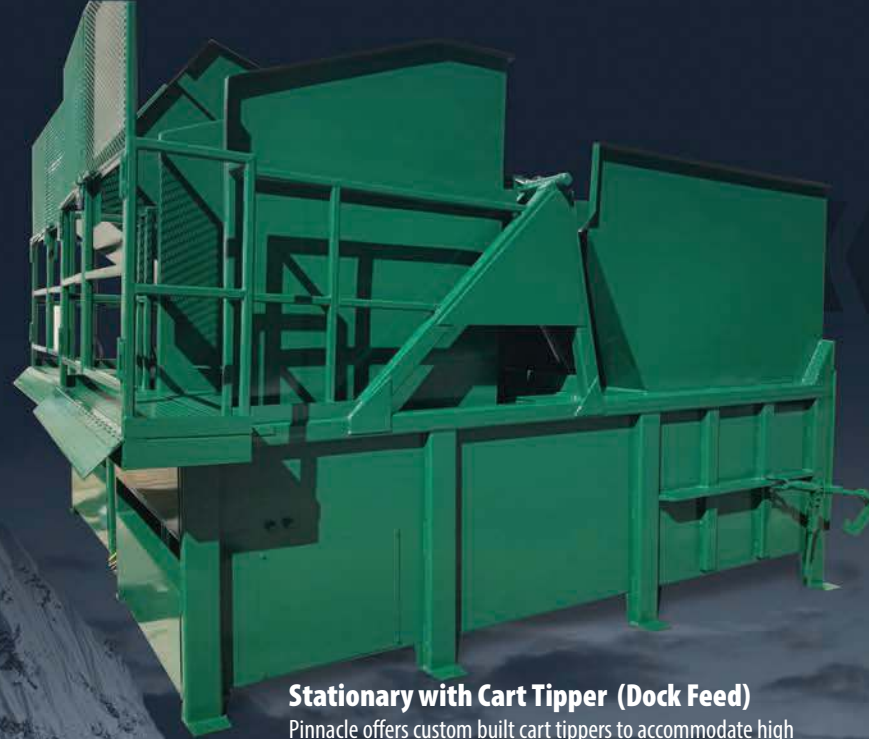

### Stationary with Cart Tipper (Dock Feed)

Pinnacle offers custom built cart tippers to accommodate high volume, heavy duty applications.



### Full Weather Enclosure (Dock Feed)

Engineered for form, fit, and function on site when compactor is installed.



### Pin-Off Option for cardboard & materials with memory -

assists in containing hard to handle materials when the receiver container is pulled away for hauling.



### High Volume, Auto Feed Applications

Pinnacle engineers compaction systems that interface with conveyor or chute fed systems that are continuously and automatically loading




### Universal & Interchangeable Receivers

Pinnacle Receiver Containers are ANSI specified to connect to not only the Pinnacle line of stationary compactors but other brands as well.





# STATIONARY COMPACTOR SPECIFICATIONS

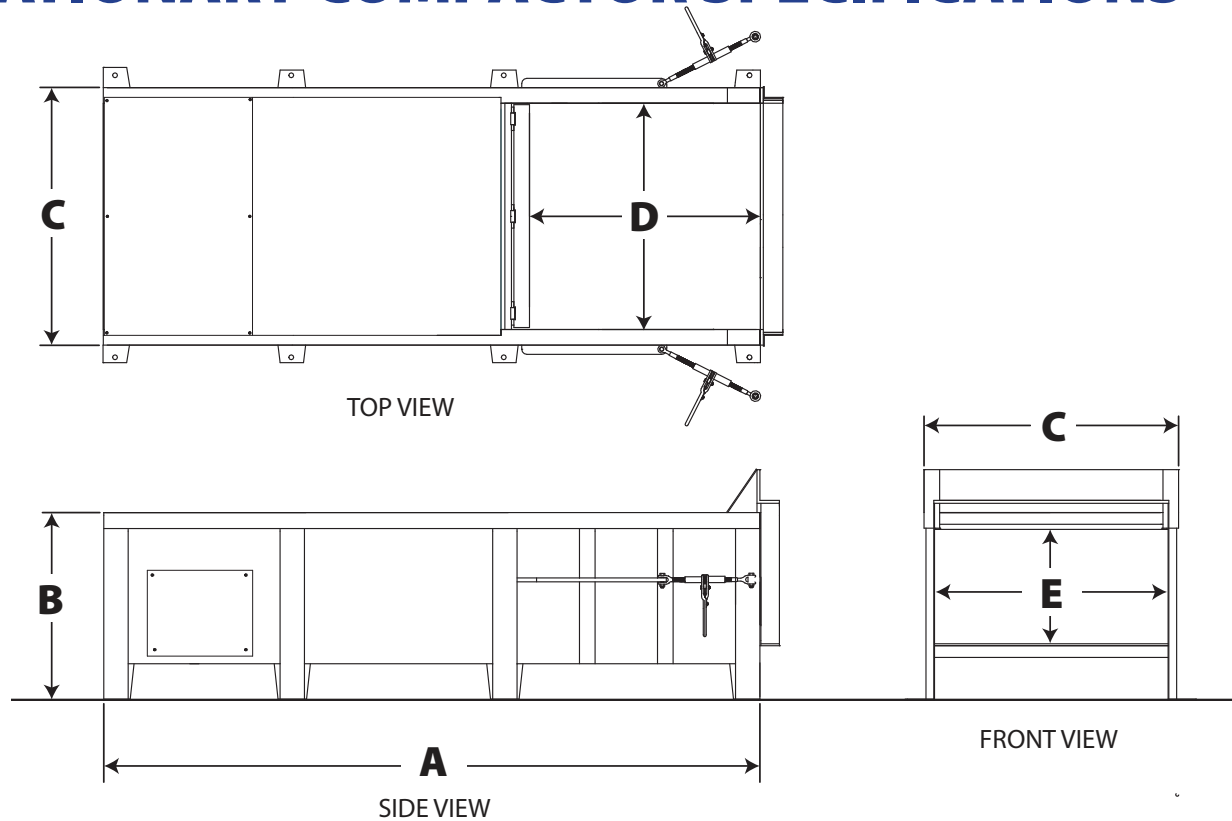

	<b>S-200 (2 YD)</b>	<b>S-300 (3 YD)</b>	<b>S-400 (4 YD)</b>	<b>S-500 (5 YD)</b>
Basic Size (cy)	1.58	2.31	2.71	4.22
<b>A</b> - Overall Length	120'	168"	168"	239"
<b>B</b> - Overall Height	48"	48"	54"	54"
<b>C</b> - Overall Width	66"	66"	66"	66"
<b>D</b> - Clear Top Opening (L x W)	46" X 60"	61" X 60"	61" X 60"	94" X 60"
<b>E</b> - Discharge Openings	37" X 60"	37" X 60"	41" X 60"	41" X 60"
Ram Penetration	11"	14"	14"	16"
Normal Force	58,400 LBS @ 2050 PSI	48,400 LBS @ 1700 PSI	48,400 LBS @ 1700 PSI	65,000 LBS @ 1700 PSI
Maximum Force	71,000 LBS @ 2550 PSI"	59,000 LBS @ 2100 PSI	59,000 LBS @ 2100 PSI	77,000 LBS @ 2100 PSI
Ram Facing	60" X 29"	60" X 29"	60" X 34"	60" X 34"
Cycle Time	60 Sec	60 Sec	60 Sec	100 Sec
Motor	15 HP	15 HP	15 HP	15 HP
Pump	12 GPM	15 GPM	15 GPM	15 GPM
Cylinder (Diameter)	6"	6"	6"	7"
Rod/Stroke	2.5" X 56"	4" X 78"	4" X 78"	4" X 110"



[bwe-nc.com](http://bwe-nc.com)



[pinnaclecompactors.com](http://pinnaclecompactors.com)

1808 Norwood Street SW  
 Lenoir, NC 28645  
 828/726-3001 (phone)  
 828/726-3010 (fax)

**800-221-4153**